

# CASA-FLASH®


Roof Flashing and universal high-flexibility  
connecting tape



- UV- and weather-stabilized, lacquered aluminium-butyl laminate
- Universal application, also as repair tape
- High stretch capacity for optimum flexibility and easy formability
- Self-adhesive, good bonding strength
- Highly rainproof

# Technical data

## „Casa-Flash®“ Roof flashing and universal high-flexibility connecting tape

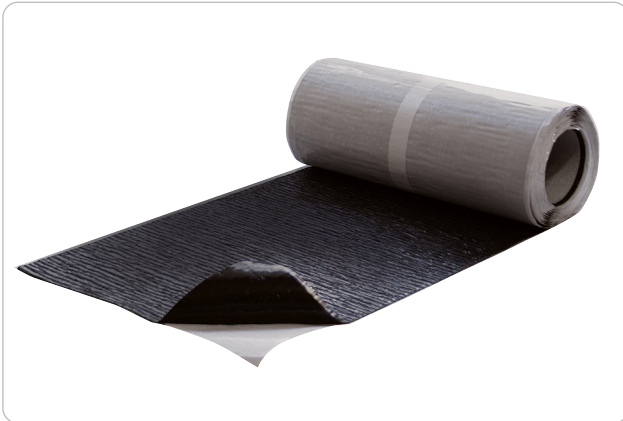

Material	Aluminium butyl laminate, upper surface with lengthways creped effect, colour coated and covered with two-part release paper
Strech factor	> 60 % due to its creped aluminium structure
Material thickness (aluminium)	0.1 mm
Butyl coating	approx. 1.0 mm
Temperature resistance	-30 °C up to +80 °C
Processing temperature	+5 °C up to +35 °C
UV-stability	UV-stable and weather resistant
Roll width	300 mm and 450 mm
Roll length	5.00 m
Colours supplied	coated on one side: red, black, brown, grey
Weight per roll	300 mm = approx. 3.2 kg 450 mm = approx. 5.0 kg
Packaging	1 roll = 5m per box 360m per pallet
Storage conditions	Store dry at room temperature, protected from direct UV radiation. Store rolls upright!

Subject to technical changes 07/2024. We assume no liability for typing errors.